

Black Polyester Label

Specification

50 micron Gloss Black Polyester

Product Description:


A high quality Gloss Clear Polyester film under surface printed black. This material has been surface treated to accept print particularly Hot Foil and Thermal Transfer.

- Film Thickness: 50 micron – Nominal
- Film Finish: Gloss black
- Adhesive Type: Acrylic Permanent

Temperature Range:

- In service: -20°C to +120°C
- Minimum label installation temperature +5°C


- Release Liner: 82g white glassine

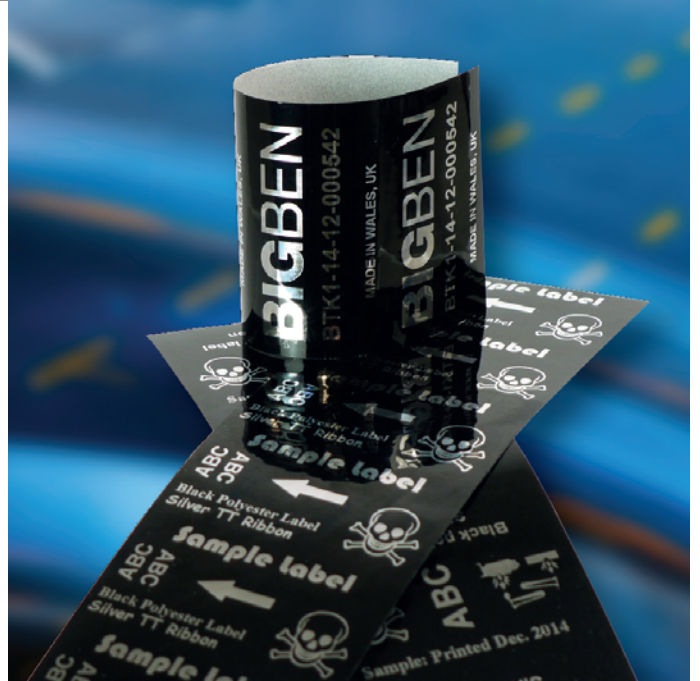

Printers

Can be used with the thermal transfer printers T200 and TE3112. For printing on these labels the following ribbons are recommended;

- Silver ribbon: [92-SLV-PR443](#)
- White ribbon: [92-WHT-PR443R](#)

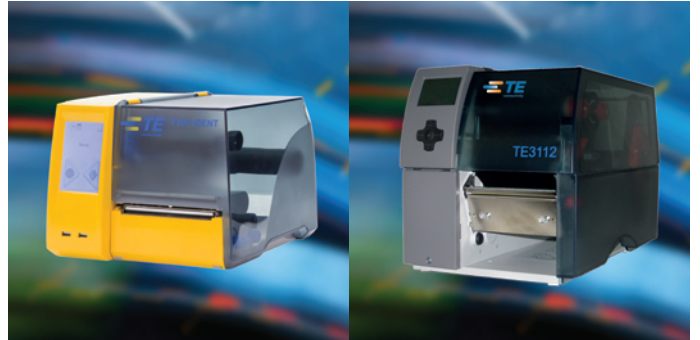

All information contained in this publication is believed to be reliable. We advise however that customers should separately evaluate the suitability of our products for their particular application. IS-Group give no guarantee in respect of the accuracy or sufficiency of the information presented and disclaim any liability regarding its use. Our responsibilities are only those listed in our Standard Terms and Conditions of Sale for these products. In no instance will we be liable for any eventual, indirect, or consequential damage or damages from the sale, resale, transfer, use or misuse of the product. Design and content is © 2015 all rights reserved.