

# Protective Sleeving

## Spiral Binding

PTFE

### Spiral Binding

PTFE Spiral binding can be used in industrial and office environments for the following applications:

- Organising wires for communication, computer equipment and control panels
- OEM applications for protecting tubes and harnesses
- Abrasion protection for control panel wiring
- Eliminate lacing cord and tie-offs

### Features & Benefits

- Re-usable
- Flexible and fast installation
- Allows breakouts and re-routing
- Harness multiple cables into a single manageable bundle

### Operating Temperature


- -70°C to 260°C



RoHS Compliant

### Specifications & Approvals

- PAN 6480
- AS4 1088

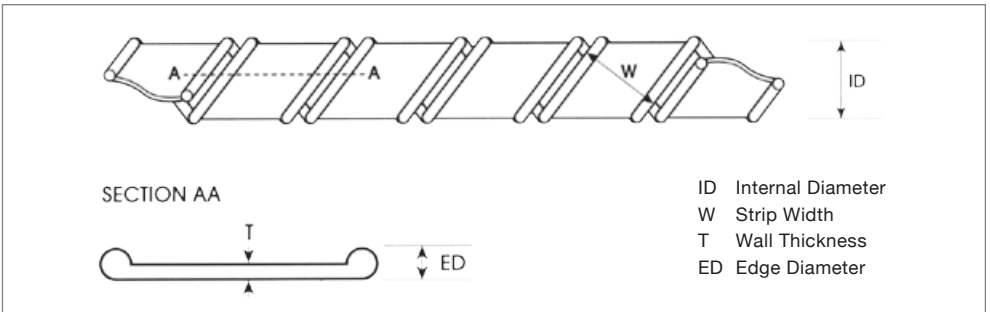

ID	Width (W)	Thickness	Edge Ø (ED)	Weight	Part Number
Nominal (mm)	Max (mm)	Nom g/m	(mm)	(g/m)	
3.0 (±0.25)	5.0 (±0.25)	0.75 (±0.08)	1.125	22.0	SB-30-Colour
5.0 (±0.40)	5.0 (±0.25)	0.75 (±0.08)	1.125	33.0	SB-50-Colour
7.5 (±0.50)	8.0 (±0.40)	0.75 (±0.08)	1.125	47.6	SB-75-Colour
12.5 (±0.65)	10.0 (±0.50)	0.75 (±0.08)	1.125	76.9	SB-125-Colour
25.5 (±0.80)	12.5 (±0.65)	1.25 (±0.10)	1.660	250.0	SB-255-Colour

### Part Number Example; SB-75-Black

7.5mm Internal diameter spiral binding, in black.

### Ordering Information

Standard Colour: Black.  
Non Standard colours: Natural, Red and Yellow  
Standard packaging: Spools only, please ask for details

© 2015 IS-Group all rights reserved no unauthorised reproduction