



PRINTABLE TAGS

PRINTABLE TAGS	PAGE
• CM-SCE-TP	29
• HTCM-SCE-TP	31
• HL	33
• HLX	35
• HLX-NEL	37



CM-SCE-TP

CM-SCE-TP Cable Markers are designed to offer flexibility when it comes to wire and cable identification. Manufactured using a specially developed radiation cross-linked polymer, CM-SCE-TP markers are resistant to many fluids, lubricants and solvents used in various industries such as, but not limited to Mass Transit, Industrial, Oil & Gas, Military and Aerospace. Applied using cable ties, CM-SCE-TP markers give the ability to identify large diameter wire and cable, as well as post connector installation.

The smooth surface is designed for thermal transfer printing. Print performance exceeds the requirements of SAE AS5942 and MIL-STD-202 Method 215.

FEATURES AND BENEFITS

- Thermal transfer printable
- Highly flame resistant - excellent resistance to burning (Oxygen Index 35%)
- Highly resistant to abrasion, mechanical abuses, fluids, lubricants and solvents
- Side entry provides access to large size cables and wire bundles as well as retrofit and repair capability
- Easy installation: only standard cable tie-wraps are needed to install markers. No extra steps required

INDUSTRY



AVAILABLE OPTIONS

Standard Colours	Yellow	White
Ordering Code	4	9
Tie-wrap Hole Options		
1/4 inch tags	Four Holes	
1/2 inch tags	Four Holes	Six Holes
Ordering Code	4H	6H
Packaging sizes	250 Pieces	
(*Minimum quantity and lead time applies to non-standard colours)		



Temperature Rating

Operating Temperature range -55°C to 135°C
(-67°F to 275°F)

Specifications and Approvals

EN45545-2 R24 HL3
NFPA130
MIL-STD-202 Method 215
UL MH26328
SAE AS 5942

Recommended Hardware and Software

Printer: T200-IDENT / TE3112 / TE3124
Ribbon: 1966 RIBBON
Software: WinTotal v6

For More information

Technical Datasheet: TTDS-113
Product Specification Sheet: RW-2513

ORDERING INFORMATION

Ordering Description	Part Number	Pack Size	Colour	Size	Marker Height		Marker Length		Recommended Use Range (Min - Max)	
		pc			mm	Inches	mm	Inches	mm	Inches
CM-SCE-TP-1/4-4H-4	F82125-000	250	Yellow	1/4	6.4	0.250	50.8	2.000	5.1-12.5	0.200-0.492
CM-SCE-TP-1/2-4H-4	A47038-000	250	Yellow	1/2	12.7	0.500	50.8	2.000	12.5 and up	0.492 and up
CM-SCE-TP-1/2-6H-4	C27444-000	250	Yellow	1/2	12.7	0.500	50.8	2.000	12.5 and up	0.492 and up
CM-SCE-TP-1/4-4H-9	768838-000	250	White	1/4	6.4	0.250	50.8	2.000	5.1-12.5	0.200-0.492
CM-SCE-TP-1/2-4H-9	E17344-000	250	White	1/2	12.7	0.500	50.8	2.000	12.5 and up	0.492 and up
CM-SCE-TP-1/4-6H-9	D96728-000	250	White	1/4	6.4	0.250	50.8	2.000	5.1-12.5	0.200-0.492
CM-SCE-TP-1/2-6H-9	A83925-000	250	White	1/2	12.7	0.500	50.8	2.000	12.5 and up	0.492 and up

ORDERING DESCRIPTION SYSTEM

CM- SCE-TP- 1/4 - 4H - 9



HTCM-SCE-TP

HTCM-SCE-TP cable markers are designed to offer flexibility when it comes to wire and cable identification, particularly in aggressive environments. Applied using cable ties, HTCM-SCE-TP markers give the ability to identify large diameter wire and cable, as well as post connector installation

Manufactured using a specially developed radiation cross-linked polyvinylidene polymer. Formulated to survive High Temperature, Low out gassing and extreme environments such as Aircraft, Military, Satellites and Semi-conductor applications

The smooth surface is designed for thermal transfer printing. Print performance exceeds the requirements of SAE AS5942 and MIL-STD-202 Method 215.



FEATURES AND BENEFITS

- Thermal transfer printable
- High Temperature Performance
- Self-extinguishing
- Highly flame resistant
- Low vacuum outgassing for outer space and Semi-conductor applications
- Easy installation: only standard cable tie-wraps are needed to install markers. No extra steps required
- Side entry provides access to large size cables and wire bundles as well as retrofit and repair capability
- Resistant to key military, aviation and Industrial fluids

INDUSTRY



AVAILABLE OPTIONS

Standard Colours	White	
Ordering Code	9	
Tie-wrap Hole Options		
1/4 inch tags	Four Holes	
1/2 inch tags	Four Holes	Six Holes
Ordering Code	4H	6H
(*Minimum quantity and lead time applies to non-standard colours)		

Temperature Rating

Operating Temperature range -55°C to 225°C
(-67°F to 437°F)

Specifications and Approvals

Airbus Directive ABD0031
NFPA130
EN45545-2 R24 HL3
ASTM E 595
MIL-STD-202 Method 215

Recommended Hardware and Software

Printer: T200-IDENT / TE3112 / TE3124
Ribbon: TMS-RJS-RIBBON-4HT
Software: WinTotal v6

For More information


Technical Datasheet: TTDS-114
Product Specification Sheet: RW-2524

ORDERING INFORMATION

Ordering Description	Part Number	Pack Size	Colour	Size	Marker Height		Marker Length		Recommended Use Range (Min - Max)	
		pc			mm	Inches	mm	Inches	mm	Inches
HTCM-SCE-TP-1/4-4H-9	A11348-000	250	White	1/4	6.4	0.250	50.8	2.000	5.1-12.5	0.200-0.492
HTCM-SCE-TP-1/2-4H-9	E99238-000	250	White	1/2	12.7	0.500	50.8	2.000	12.5 and up	0.492 and up
HTCM-SCE-TP-1/4-6H-9	E62731-000	250	White	1/4	6.4	0.250	50.8	2.000	5.1-12.5	0.200-0.492
HTCM-SCE-TP-1/2-6H-9	E61464-000	250	White	1/2	12.7	0.500	50.8	2.000	12.5 and up	0.492 and up

ORDERING DESCRIPTION SYSTEM

HTCM - SCE-TP - 1/4 - 4H - 9

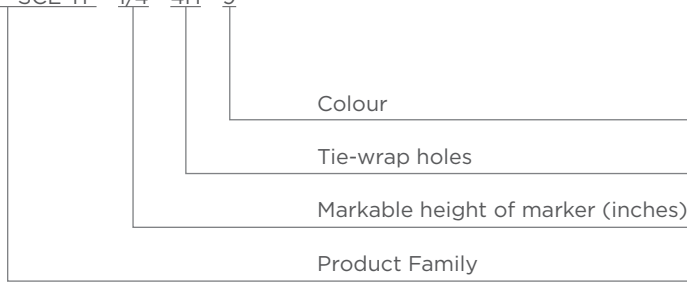

HL

HL cable markers are designed to offer flexibility when it comes to wire and cable identification in particularly aggressive environments. Typical installations include Mass Transit, Military, Aerospace and Industrial Applications. Applied using cable ties, HL cable markers give the ability to identify large diameter wire and cable, as well as post connector installation

Presented as organised markers assembled onto either a fanfold or reeled paper carrier to allow for greater range of printing formats and kitting.

FEATURES AND BENEFITS


- Thermal transfer printable
- Highly flame resistant (Excellent resistance to burning - Oxygen Index 35%)
- Resistant to key industrial and military grade fluids
- Recommended for use where de-termination of wires is not possible for large ID wires or wire bundles
- Several printable widths and heights available
- Non-standard colour options available

INDUSTRY



AVAILABLE OPTIONS

Standard Colours	White
Ordering Code	WE
Format	TS
	Thermal transfer (reel/ single sided)
(*Minimum quantity and lead time applies to non-standard colours)	

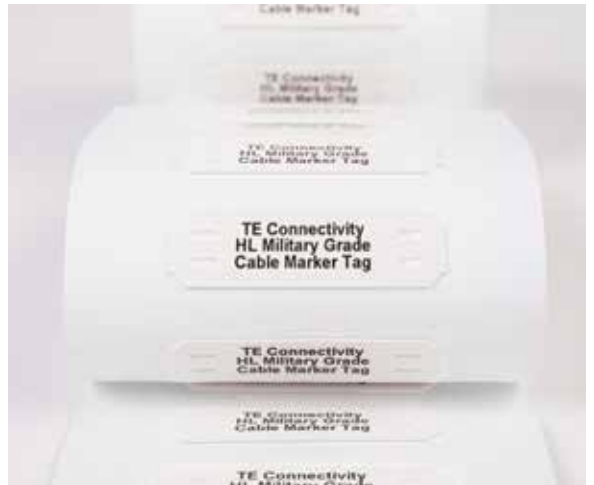

Temperature Rating

Operating Temperature range -55°C to 135°C
(-67°F to 275°F)

Specifications and Approvals

EN45545-2 R24 HL3

Recommended Hardware and Software


Printer: T200-IDENT / TE3112 / TE3124
Ribbon: 1966-RIBBON
Software: WinTotal v6

For More information

Technical Datasheet: TTDS-037
Product Specification Sheet: RW-2513

ORDERING INFORMATION

Ordering Description	Part Number	Pack Size	Colour	Marker Width		Marker Height		Printable Area (W x H)	
		pc		mm	Inches	mm	Inches	mm	Inches
HL104WEITS025B	EC7552-000	1000	White	45.0	1.800	10.4	0.400	25.0 x 10.4	1.000 x 0.400
HL104WEITS033B	EC7553-000	1000	White	52.0	2.100	10.4	0.400	33.0 x 10.4	1.300 x 0.400
HL104WEITS038B	EC7554-000	1000	White	58.0	2.300	10.4	0.400	38.0 x 10.4	1.500 x 0.400
HL104WEITS050B	EC7555-000	1000	White	70.0	2.750	10.4	0.400	50.0 x 10.4	2.000 x 0.400
HL104WEITS070B	EC7556-000	1000	White	90.0	3.500	10.4	0.400	70.0 x 10.4	2.750 x 0.400
HL150WEITS033B	EC7573-000	1000	White	52.0	2.100	15.0	0.600	33.0 x 15.0	1.300 x 0.600
HL150WEITS050B	EC7574-000	1000	White	70.0	2.750	15.0	0.600	50.0 x 15.0	2.000 x 0.600
HL150WEITS070B	CP1098-000	1000	White	90.0	3.500	15.0	0.600	70.0 x 15.0	2.750 x 0.600
HL203WEITS025B	EC7588-000	1000	White	45.0	1.800	20.3	0.800	38.0 x 20.3	1.000 x 0.800
HL203WEITS033B	EC7589-000	1000	White	52.0	2.100	20.3	0.800	33.0 x 20.3	1.300 x 0.800
HL203WEITS038B	EE0111-000	1000	White	58.0	2.300	20.3	0.800	38.0 x 20.3	1.500 x 0.800
HL203WEITS050B	EC7590-000	1000	White	70.0	2.750	20.3	0.800	50.0 x 20.3	2.000 x 0.800
HL203WEITS070B	EC7591-000	1000	White	90.0	3.500	20.3	0.800	70.0 x 20.3	2.750 x 0.800
HL253WEITS025B	EC7605-000	1000	White	45.0	1.800	25.3	1.000	25.0 x 25.3	1.000 x 1.000
HL253WEITS033B	EC7606-000	1000	White	52.0	2.100	25.3	1.000	33.0 x 25.3	1.300 x 1.000
HL253WEITS038B	EC7607-000	1000	White	58.0	2.300	25.3	1.000	38.0 x 25.3	1.500 x 1.000
HL253WEITS050B	EC7608-000	1000	White	70.0	2.750	25.3	1.000	50.0 x 25.3	2.000 x 1.000
HL253WEITS070B	EC7609-000	1000	White	90.0	3.500	25.3	1.000	70.0 x 25.3	2.750 x 1.000

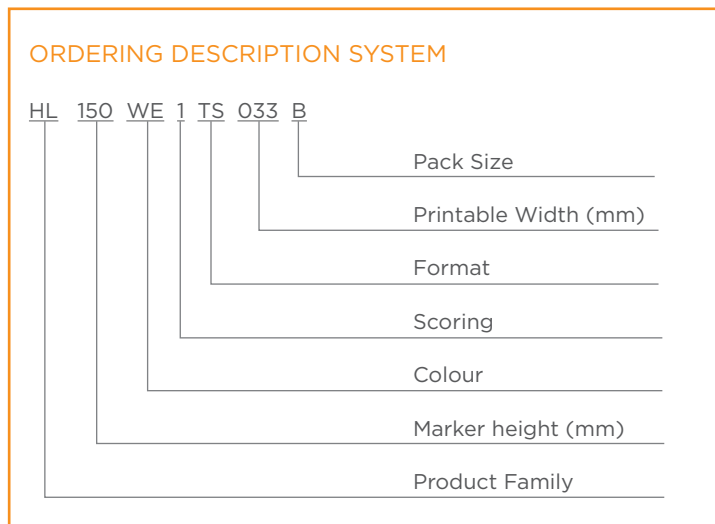

HLX

HLX cable markers are designed to offer flexibility when it comes to wire and cable identification in particularly aggressive environments. Presented as organised markers assembled onto a reel. Applied using cable ties, HLX cable markers give the ability to identify large diameter wire and cable, as well as post connector installation.

Manufactured using a specially developed radiation cross-linked polymer. Formulated to give Low Fire Hazard, zero halogen, low smoke, low toxicity and UV stabilized properties, which allows this product to be used in locations where limited fire hazard characteristics are necessary. Typical installations include underground railways, mass transit and Industrial.

FEATURES AND BENEFITS

- Thermal transfer printable
- Excellent resistance to burning - Oxygen Index 39%
- Zero Halogen
- Low toxic fumes
- Low Smoke
- Self-extinguishing
- Recommended for use where combustion of products may endanger personnel or place delicate electronics at risk
- Resistant to key industrial and rail fluids
- Ideal for low volume applications
- Ideal for pre or post termination assembly

INDUSTRY



AVAILABLE OPTIONS

Standard Colours	White
Ordering Code	WE
Format	TS
	Thermal transfer (reel/ single sided)
(*Minimum quantity and lead time applies to non-standard colours)	



Temperature Rating

Operating Temperature range -40°C to 105°C
(-40°F to 221°F)

Specifications and Approvals

EN45545-2 R22/R23/24 HL3
MIL-STD-202 Method 215
NF F 16-101 Classification A1
London Underground 1-085 A3
BS6853 Vehicle cat 1a
SAE AS5942

Recommended Hardware and Software

Printer: T200-IDENT / TE3112 / TE3124
Ribbon: 1966-RIBBON
Software: WinTotal v6


For More information

Technical Datasheet: TTDS-013
Product Specification Sheet: RW-2523

ORDERING INFORMATION

Ordering Description	Part Number	Pack Size	Colour	Marker Width		Marker Height		Printable Area (W x H)	
		pc		mm	Inches	mm	Inches	mm	Inches
HLX104WEITS025B	EC7629-000	1000	White	45.0	1.800	10.4	0.400	25.0 x 10.4	1.000 x 0.400
HLX104WEITS033B	EC77630-000	1000	White	52.0	2.100	10.4	0.400	33.0 x 10.4	1.300 x 0.400
HLX104WEITS038B	EC7631-000	1000	White	58.0	2.300	10.4	0.400	38.0 x 10.4	1.500 x 0.400
HLX104WEITS050B	EC7632-000	1000	White	70.0	2.750	10.4	0.400	50.0 x 10.4	2.000 x 0.400
HLX104WEITS070B	EC7633-000	1000	White	90.0	3.500	10.4	0.400	70.0 x 10.4	2.750 x 0.400
HLX150WEITS033B	EC7639-000	1000	White	52.0	2.100	15.0	0.600	33.0 x 15.0	1.300 x 0.600
HLX150WEITS050B	EC7640-000	1000	White	70.0	2.750	15.0	0.600	50.0 x 15.0	2.000 x 0.600
HLX150WEITS070B	CPI641-000	1000	White	90.0	3.500	15.0	0.600	70.0 x 15.0	2.750 x 0.600
HLX203WEITS025B	EC7642-000	1000	White	45.0	1.800	20.3	0.800	38.0 x 20.3	1.000 x 0.800
HLX203WEITS033B	EC7648-000	1000	White	52.0	2.100	20.3	0.800	33.0 x 20.3	1.300 x 0.800
HLX203WEITS038B	EC7649-000	1000	White	58.0	2.300	20.3	0.800	38.0 x 20.3	1.500 x 0.800
HLX203WEITS050B	EC8791-000	1000	White	70.0	2.750	20.3	0.800	50.0 x 20.3	2.000 x 0.800
HLX203WEITS070B	EC7650-000	1000	White	90.0	3.500	20.3	0.800	70.0 x 20.3	2.750 x 0.800
HLX253WEITS025B	EC7651-000	1000	White	45.0	1.800	25.3	1.000	25.0 x 25.3	1.000 x 1.000
HLX253WEITS033B	EC7656-000	1000	White	52.0	2.100	25.3	1.000	33.0 x 25.3	1.300 x 1.000
HLX253WEITS038B	EC7657-000	1000	White	58.0	2.300	25.3	1.000	38.0 x 25.3	1.500 x 1.000
HLX253WEITS050B	EC7658-000	1000	White	70.0	2.750	25.3	1.000	50.0 x 25.3	2.000 x 1.000
HLX253WEITS070B	EC7660-000	1000	White	90.0	3.500	25.3	1.000	70.0 x 25.3	2.750 x 1.000

ORDERING DESCRIPTION SYSTEM

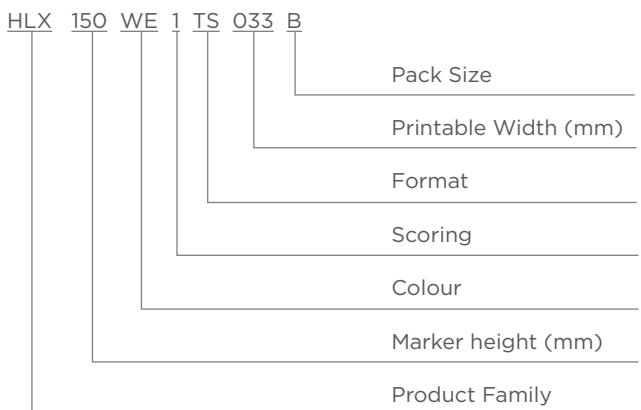

HLX-NEL

HLX-NEL cable markers are designed to offer flexibility when it comes to wire and cable identification. Manufactured from the same Low Fire Hazard, UV stabilised material as HLX, with the difference being that it is assembled in a Narrow Edge Leading (NEL) format. Ideal for applications where low fire hazard characteristics (low smoke, low toxicity and low flammability) and UV protection are critical. Applied using cable ties, HLX-NEL cable markers give the ability to identify large diameter wire and cable, as well as post connector installation.

FEATURES AND BENEFITS

- Thermal transfer printable
- Excellent resistance to burning - Oxygen Index 39%
- Zero Halogen
- Low toxic fumes
- Low Smoke
- Self-extinguishing
- Recommended for use where combustion of products may endanger personnel or delicate electronics at risk
- Resistant to key industrial and rail fluids
- Ideal for low volume applications
- Cost effective identification solution
- Ideal for pre or post termination assembly

INDUSTRY



AVAILABLE OPTIONS

Standard Colours	White	Yellow
Ordering Code	WE	YW
Format	TS	
	Thermal transfer (reel/ single sided)	

(*Minimum quantity and lead time applies to non-standard colours)



Temperature Rating

Operating Temperature range -40°C to 105°C
(-40°F to 221°F)

Specifications and Approvals

EN45545-2 R22/R23/R24 HL3
MIL-STD-202 Method 215
NF F 16-101 Classification A1
London Underground 1-085 A3
BS6853 Vehicle cat 1a
SAE AS5942

Recommended Hardware and Software

Printer: T200-IDENT / TE3112 / TE3124
Ribbon: 1966-RIBBON
Software: WinTotal v6


For More information

Technical Datasheet: TTDS-134
Product Specification Sheet: RW-2529

ORDERING INFORMATION

Ordering Description	Part Number	Pack Size	Colour	Markers across	Marker Width		Marker Height		Printable Area (W x H)	
		pc			mm	Inches	mm	Inches	mm	Inches
HLX125YW2NEL60S	CC0110-000	200	Yellow	2	80.0	3.15	12.5	0.490	60.0 x 10.5	12.35 x 0.40
HLX125WE2NEL60S	CC0111-000	200	White	2	80.0	3.15	12.5	0.490	60.0 x 10.5	12.35 x 0.40
HLX125YW4NEL60S	CC0109-000	200	Yellow	4	80.0	3.15	12.5	0.490	60.0 x 10.5	12.35 x 0.40
HLX125WE4NEL60S	CC0112-000	200	White	4	80.0	3.15	12.5	0.490	60.0 x 10.5	12.35 x 0.40

ORDERING DESCRIPTION SYSTEM

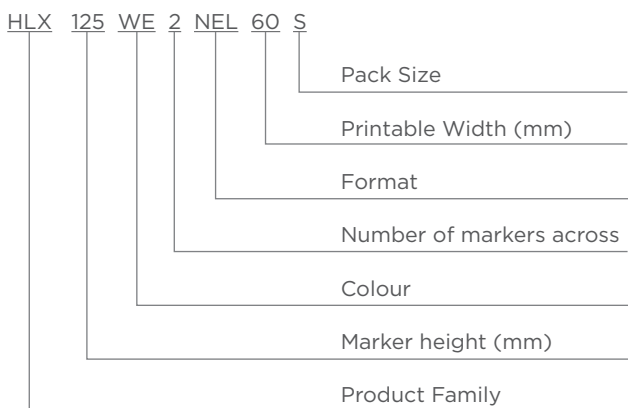

Tel: +44(0) 1793616700 • Fax: +44(0) 1793 644304
uksales@is-rayfast.com • export@is-rayfast.com

www.is-rayfast.com

2 Lydiard Fields, Swindon, Wiltshire, SN5 8UB

